


# Staffordshire Slate Blue Smooth



**Ibstock**  
At the heart of building

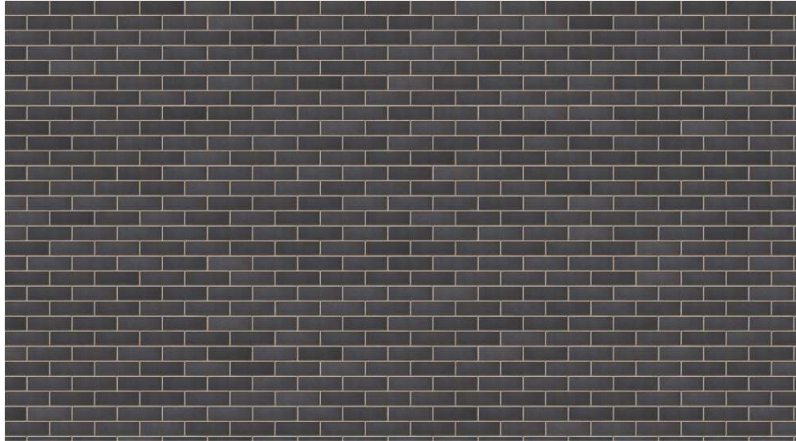

## Product Information

Ibstock Code:	A2232A
Type:	Wirecut Extruded
Facing Description:	Smooth
Dry Brick Weight (kg):	2.4kg
Pack Quantity:	380
Packaging (standard):	Banded (Plastic)
Factory:	Lodge Lane
EPD:	

## Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	23-28
Compressive Strength (N/mm <sup>2</sup> ):	75
Active Soluble Salts:	S2
Water Absorption (% weight):	7
Durability:	F2~
Gross Dry Density (Sound Insulation) (Kg/m <sup>3</sup> ):	1650
Equivalent Thermal Conductivity "K" value 5% Exposed:	1.19
Initial Rate of Absorption (Suction Rate) (Kg/m <sup>2</sup> /min):	0.1
EAN:	5.03634E+12